
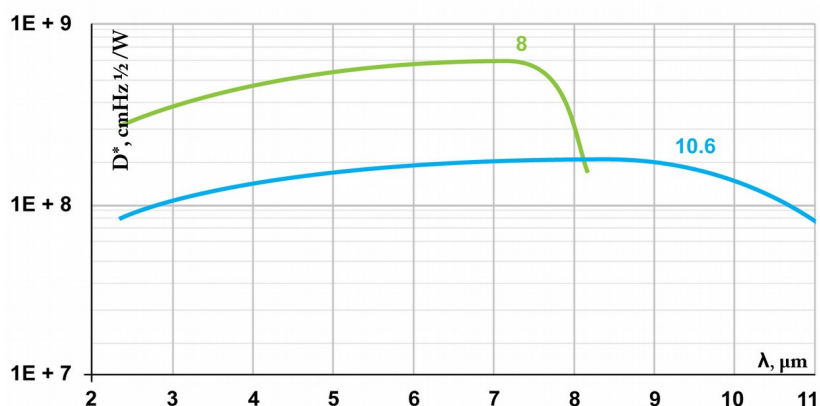


PVM-2TE Series

8 – 11 μm IR PHOTOVOLTAIC MULTIPLE JUNCTION DETECTORS THERMOELECTRICALLY COOLED



Example of D^* vs Wavelength λ for PVM-2TE Series HgCdTe Detectors. Spectral Characteristics of individual detectors may vary from those shown on the chart.

Features

- High performance in the 8 to 11 μm spectral range
- Fast response
- No flicker noise
- Convenient to use
- Wide dynamic range
- Compact, rugged and reliable
- Low cost
- Prompt delivery
- Custom design upon request

Description

The **PVM-2TE- λ_{opt}** photodetectors series (λ_{opt} - optimal wavelength in micrometers) feature IR multiple junction photovoltaic detector on two-stage thermoelectrical cooler. The devices are optimized for the maximum performance at λ_{opt} , large area devices. Highest performance and stability are achieved by application of variable gap **HgCdTe** semiconductor, optimized doping and sophisticated surface processing. Custom devices with quadrant cells, multielement arrays, different windows, lenses and optical filters are available upon request. Standard detectors are available in **TO8** packages with **wZnSeAR** windows. Other packages, windows and connectors are also available.

IR Detector Specification @20°C

Parameter	Symbol	Unit	PVM-2TE-8	PVM-2TE-10.6
Optimal Wavelength ¹⁾	λ_{opt}	μm	8	10.6
Detectivity ²⁾ :				
@ λ_{peak}	D^*	$\frac{\text{cm} \cdot \sqrt{\text{Hz}}}{\text{W}}$	$\geq 6.0 \times 10^8$	$\geq 2.0 \times 10^8$
@ λ_{opt}			$\geq 3.0 \times 10^8$	$\geq 1.0 \times 10^8$
Current Responsivity - Width Product @ λ_{opt} 1×1mm	$R_i \cdot w$	$\frac{\text{A} \cdot \text{mm}}{\text{W}}$	≥ 0.015	≥ 0.006
Time Constant	τ	ns	≤ 4	≤ 3
Resistance	R	Ω	150 to 600	100 to 350
Operating Temperature	T	K	~230	
Acceptance Angle, F/#	Φ , -	deg, -	70, 0.87	

¹⁾ Other Optimal Wavelengths available upon request.

²⁾ Data Sheet states minimum guaranteed D^* values for each detector model. Higher performance detectors can be provided upon request.

Type	Optical Area [mm×mm]									
	0.025×0.025	0.05×0.05	0.1×0.1	0.2×0.2	0.25×0.25	0.5×0.5	1×1	2×2	3×3	4×4
PVM-2TE-8	O	O	X	X	O	O	X	X	X	
PVM-2TE-10.6	O	O	X	X	O	O	X	X	X	

X – standard detectors

O – detectors available upon request, parameters may vary from these in Data Sheet